

PRO MIXER DJX750

Professional 5-Channel DJ Mixer with Advanced Digital Effects and BPM Counter

- Professional 5-channel ultra-low noise DJ mixer with stylish, black design
- State-of-the-art digital effects with advanced parameter control
- Intelligent dual auto-BPM counter with time and beat sync display
- Super-smooth Ultraglide faders with up to 500,000 life cycles
- Awesome adjustable XPQ stereo surround effect
- VCA-controlled crossfader for utmost reliability and smooth audio performance
- Adjustable crossfader curve for all mixing styles
- 3-band kill EQ (-32 dB) and precise level meters with peak hold function per channel
- Additional 3-way kill switches with extremely steep frequency separation
- Monitor function with master/cue balance control and split option
- Auto-talkover function with separate depth control
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany



Own the Night with the DJX750

Need an analog DJ mixer for your dance club? Don't want to settle for some run-of-the-mill DJ desk you'll outgrow in just a few weeks? The new PRO MIXER DJX750 DJ Mixer merges intuitive operation with built-in digital effects processing for clean, transparent sound that will set your dance floor on fire!

Not Just a DJX700 dressed in black!

DJs the world over love the DJX700 — and we are grateful that so many have made it their “go-to” mixer. So when we began design on the DJX750, we knew we had to do something very special. We started by revving up the FX processor and putting advanced parameter control right at your fingertips.

No longer are you confined to rigid presets that limit your creativity. With the DJX750, you can change FX parameters on-the-fly, pushing your performance to the next level. In no time you'll be creating powerful sets with your own custom-tailored effects sounds, all of which can be controlled in real-time. Some parameters at your disposal include Bit Crusher depth, manual filter sweeps, Panning (LFO Rate), delay/echo time and much more. You can even set delay and echo timing relative to the internal BPM counter for extremely musical results. It is kinda like a DJX700 — but one on steroids!

Continued on next page



PRO MIXER DJX750

Channels Galore

Because your voice is your instrument, the DJX750 features a dedicated mic channel with all the tools to make your sound supremely distinctive. Vocal fine-tuning is handled by the onboard 3-band EQ, which provides up to 15 dB of boost or cut at LOW (80 Hz), MID (2.5 k), and HIGH (12 kHz) frequency centers — creating an extremely broad tonal palette. The DJX750's stereo channels' EQ utilize the same frequency centers with a boost of up to 12 dB and a cut of as much as -32dB. These channels are equipped to handle every conceivable input source — from line level, phono, CD and tape decks to mp3 and minidisk players, we've got you covered.

Auto Ducking

DJX750's talkover function automatically detects your voice and brings down the volume of the music track (referred to as "ducking"), so your voice is always out front — you can even set this level to your own personal preference.

Auto BPM Counter

Sync'ing up tracks is an art unto itself — that's why we gave the DJX750 dual Auto BPM Counters. This cool feature helps take the guess work out of making a smooth transition from one track to the next. Each BPM counter's digital display shows which channel it is tracking and the tempo of the music in beats per minute. Optionally, you can push the Beat Assist button in time with the song to manually enter the tempo. You get a read out of the tempo difference between the tracks, as well as a visual confirmation when they are in sync. These tools will help you seamlessly align two tracks — without having to rely solely on your ears.

Crossfader & Channel Faders

All of our super-smooth faders are of the high-grade 45-mm ULTRAGLIDE variety. Faders are, after all, the heart and soul of every mixer, and with their 500,000 cycle life expectancy (that's 275 fades per night, per fader for five years without a break!), they outperform standard faders more than twenty-to-one. And since the crossfader uses VCA (Voltage Controlled Amplifier) technology, there is virtually no audio noise. For those of you who prefer customized crossfading, the DJX750 also includes our CF Curve control, which lets you set the crossfader's control characteristic just the way you like it. It is, after all, your show!

XPQ 3D

Making music larger than life is what it's all about and the DJX750 comes through on this in a big way. XPQ 3D Surround widens the stereo field, giving it immense depth and creating a stereo image that is full of life, with amazingly transparent sound. You determine the intensity of this stunning effect with a simple twist of the Surround control — from barely noticeable to supremely spectacular.

Onboard Digital Effects


Really good digital effects add the finishing touch to a solid performance, and ours are really good! With 33 outstanding effects to choose from, including an assortment of Phase Shifters, Flangers, Reverbs, Delays and more, your audience won't know what hit them. There are even Auto Filter and Voice Changer effects that will take your show to a whole new level.

Monitor Multi-tasking

You can't put on much of a show if you can't hear what you're mixing! That's why we didn't cut any corners on DJX750's monitor section. When the monitor Mode switch is in the "Split" position, you hear the PFL (Pre-Fader Level) output on the left side of your phones, and the Master signal on your right. If you prefer working in "Stereo" mode, you can turn the MIX control fully counterclockwise to hear the channel PFL signal in both sides of your headphones, fully clockwise for the Master output, or you can "mix" both signals by adjusting the control to anywhere in-between. You can listen to one or multiple sources, and LEDs light up to indicate what you're listening to.

Continued on next page

Typical Hook-up

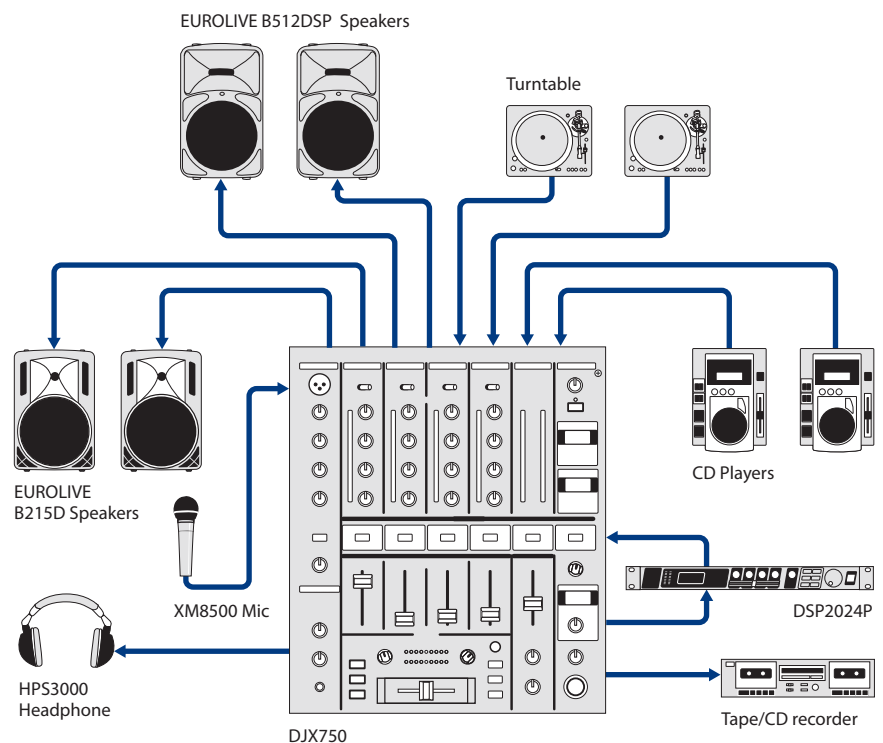

PRO MIXER DJX750

Sound Quality

None of the above-mentioned features would amount to much if the DJX750 didn't sound truly remarkable. That's why we equip each one with our tried-and-true ULN (Ultra Low-Noise) preamps: what comes in comes out,

with nothing added. So you get maximum headroom, extremely low noise and ultra-transparent sound. Compare it to the competition for sound quality, features and value and you'll see why more and more DJs "own the night" with their BEHRINGER DJX750.

Front Panel

Source select. Ch. 1 has 2 line inputs

MIC IN XLR connector for dynamic mic

MIC channel GAIN control

MIC channel 3-band EQ (HI, MID and LOW, no kill characteristic)

MIC ON switch

MODE switch — selects "Split" or "Mix" headphone monitoring

MIX control (Stereo Mode only) sets channel PFL (Pre-Fader Level) balance and **MASTER** phones signal

Headphone LEVEL and jack. Headphone source selection switches

Source select. Channels 2-4 have Phono and Line/CD inputs

GAIN control adjusts level of input signal on program channels

10-digit LED input level displays

Talkover control sets level of voice over music program (ducking)

CHANNEL faders

TEMPO DIFFERENCE LED displays tempo difference between tracks

TIME OFFSET LED indicates track synchronization

VCA controlled professional 45-mm **CROSSFADER**

ASSIGN A and **ASSIGN B** selectors determine which input signals are routed to **CROSSFADER** sides

MASTER LEVEL meter

HI, MID and LOW EQ with -32 dB kill characteristic (Ch. 1-4)

Headphone source selection switches

MASTER BALANCE to set Master panorama

CF CURVE control alters the crossfader control characteristic between

3-band KILL switches for A and B sides of crossfader

XPQ 3D SURROUND control and **XPQ ON** switch create wider, more transparent stereo image when activated

Integral Auto BPM (Beat Per Minute) counters, with **SYNC LOCK** and **BEAT ASSIST** buttons help make smooth transition when crossfading between tracks

Digital FX SOURCE selector switch and 3-digit display

PROGRAM control selects effect and adjusts the available parameter

LEVEL control sets effect signal volume

FX ON switch

BOOTH LEVEL control adjusts level of **BOOTH** output

Rear Panel

Power switch

IEC power socket

MAIN output to amps or active speaker system

TAPE or **CD** recorder output

Ground connection for turntables

Phono, CD & line-level inputs

Fuse compartment and voltage selector

BOOTH output

External FX Send and Return

PHONO/LINE Select switch

CAUTION REPLACE FUSE WITH SAME TYPE FUSE AND RATING. ATTENTION: UTILISER UN FUSIBLE DE RE CHANGEMENT TYPE ET CALIBRE.

CAUTION THIS IS NOT A TOY! DO NOT OPERATE WITHOUT PROPER TRAINING. ATTENTION: NE PAS JEUER AVEC CE MIXEUR SANS FORMATION ADAPTEE.

SERIAL NUMBER

MODEL DJX750 CONCEPTED AND DESIGNED BY BEHRINGER GERMANY. MADE IN CHINA.

FC

PRO MIXER DJX750

Specifications

Audio Inputs

Mic	40 dB Gain, XLR, electronically balanced input stage
Phono in	40 dB Gain, unbalanced input
Line in	0 dB Gain, unbalanced inputs
CD in	0 dB Gain, unbalanced inputs
Return	0 dB Gain, unbalanced input

Audio Outputs

Master	max. +21 dBu
Booth	max. +21 dBu
Tape	typ. 0 dBu
Send	typ. 0 dBu
Phones Out	max. 180 mW @ 75 W / 1% THD

Equalizer

Stereo Low	+12 dB/-32 dB @ 50 Hz
Stereo Mid	+12 dB/-32 dB @ 1.2 kHz
Stereo High	+12 dB/-32 dB @ 10 kHz
Mic Low	+15 dB/-15 dB @ 80 Hz
Mic Mid	+15 dB/-15 dB @ 2.5 kHz
Mic High	+15 dB/-15 dB @ 12 kHz
Kill Low	-54 dB @ 50 Hz
Kill Mid	-44 dB @ 1 kHz
Kill High	-26 dB @ 10 kHz

Digital Effects Processor

DSP	Freescape
A/D-D/A converter	24-bit Sigma-Delta, 64/128-times oversampling
Sampling rate	46.875 kHz

System Specifications

Signal-to-noise ratio	> 80 dB (Line)
Crosstalk	> 70 dB (Line)
Distortion (THD)	< 0.03%
Frequency response	10 Hz - 55 kHz, +0/-3 dB

Power Supply

Power consumption	32 W
Mains connection	Standard IEC receptacle

Mains voltages/Fuses

100 - 120 V~, 50/60 Hz	T 1 A H
220 - 230 V~, 50/60 Hz	T 500 mA H

Dimensions/Weight

Dimensions (H x W x D)	approx. 3.26 x 12.59 x 14.56" approx. 83 x 320 x 370 mm
Weight	approx. 8.81 lbs approx. 4 kg

Please note these specifications are preliminary and conceptual in nature, and as such are subject to change as product development progresses. This information is supplied for market research purposes only and is not to be made public in any manner. This document is solely the property of The MUSIC Group, or one of its subsidiaries, and must be surrendered upon request of the owner.

For service, support or more information contact the BEHRINGER location nearest you:

Europe MUSIC Group Services EU GmbH
Tel.: +49 2154 9206 4149 / Fax: +49 2154 9206 4199

USA/Canada MUSIC Group Services US Inc.
Tel.: +1 425 672 0816 / Fax: +1 425 673 7647

Singapore MUSIC Group Services SG (Pte.) Ltd
Tel.: +65 6845 1800 / Fax: +65 6214 0275

Australia MUSIC Group Services AU Pty Ltd
Tel.: +61 03 9877 7170 / Fax: +61 03 9877 7870

Japan MUSIC Group Services JP K.K.
Tel.: +81 3 5281 1180 / Fax: +81 3 5281 1181

TECHNICAL SPECIFICATIONS AND APPEARANCES ARE SUBJECT TO CHANGE WITHOUT NOTICE AND ACCURACY IS NOT GUARANTEED. BEHRINGER IS PART OF THE MUSIC GROUP (MUSIC-GROUP.COM). ALL TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. MUSIC GROUP ACCEPTS NO LIABILITY FOR ANY LOSS WHICH MAY BE SUFFERED BY ANY PERSON WHO RELIES EITHER WHOLLY OR IN PART UPON ANY DESCRIPTION, PHOTOGRAPH OR STATEMENT CONTAINED HEREIN. COLORS AND SPECIFICATIONS MAY VARY FROM ACTUAL PRODUCT. MUSIC GROUP PRODUCTS ARE SOLD THROUGH AUTHORIZED FULFILLERS AND RESELLERS ONLY. ALL RIGHTS RESERVED. © 2011 MUSIC Group IP Ltd. Trident Chambers, Wickhams Cay, P.O. Box 146, Road Town, Tortola, British Virgin Islands. FOR INTERNAL USE BY BEHRINGER DEALERS ONLY. DO NOT DISTRIBUTE. 985-10000-00354

behringer.com

