


VMX300

PRO MIXER

Technical Specifications

Version 1.1 September 2002

ENGLISH

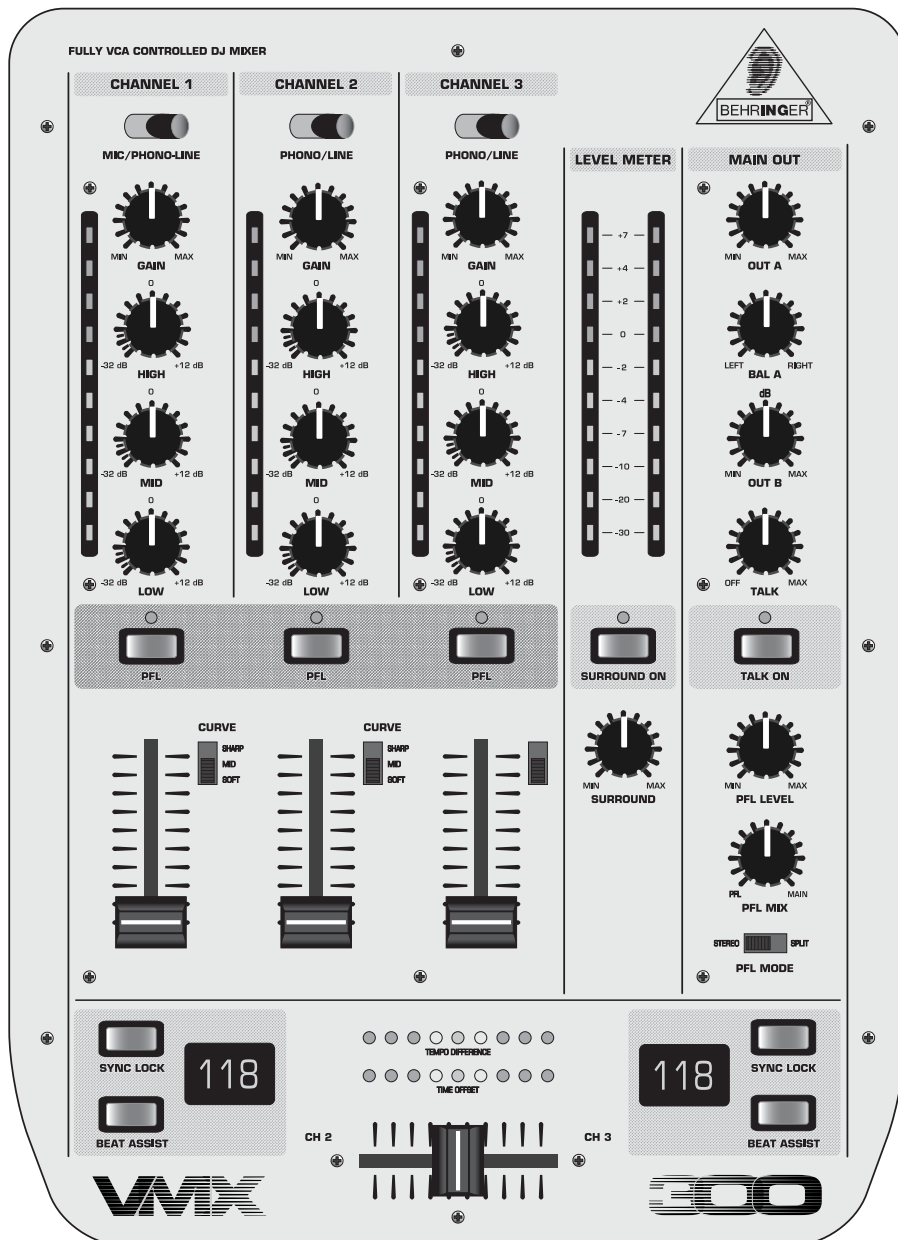

www.behringer.com

PRO MIXER

Professional 3-channel ultra low-noise DJ mixer

- ▲ Intelligent dual auto-BPM counter with time and beat sync display
- ▲ Super-smooth Ultraglide faders with up to 500,000 life cycles
- ▲ Awesome QRS 3D surround effect
- ▲ Dedicated curve control for all faders
- ▲ VCA engines for utmost reliability and smooth audio performance
- ▲ Extremely steep frequency separation via front-panel 3-way kill switches with revolutionary keyboard-like tap & hold action
- ▲ Gain and 3-band kill EQ (-32 dB) per channel
- ▲ Precise level meters with peak hold function per channel
- ▲ Crossfader reverse switch
- ▲ Auto-talkover function with separate depth control
- ▲ Extremely low-noise ULN-(Ultra-Low Noise) design, like those on professional studio consoles
- ▲ Gold-plated cinch sockets for excellent audio qualities
- ▲ Super-rugged construction ensures long life, even under the most demanding conditions
- ▲ Manufactured under ISO9000 certified management system

VMX300

SPECIFICATIONS

AUDIO INPUTS

Mic input	46 dB gain, servo-balanced
Phono inputs 1, 2 and 3	40 dB gain @ 1 kHz, unbalanced
Line inputs 1, 2 and 3	0 dB gain, unbalanced
Return	0 dB gain, unbalanced

AUDIO OUTPUTS

Main Out	max. +21 dBu @ +5 dBu (Line In)
Booth Out	max. +13 dBu
Tape Out	typically 0 dBu
Send	typically 0 dBu
Headphones	typically 125mW @ 1 % THD

EQUALIZER (+/-8 dB)

Stereo Low	+12 dB/-32 dB @ 50 Hz
Stereo Mid	+12 dB/-32 dB @ 1,2 Hz
Stereo High	+12 dB/-32 dB @ 10 kHz
Kill Low	-54 dB @ 50 Hz
Kill Mid	-44 dB @ 1 kHz
Kill High	-26 dB @ 10 kHz

GENERAL

Signal-to-noise ratio (S/N)	> 85 dB (Line)
Crosstalk	> 77 dB (Line)
Distortion (THD)	< 0,05%
Frequency response	20 Hz - 20 kHz
Input gain adjustment	-20 dB - +9 dB

POWER SUPPLY

AC voltage	USA/Canada	120 V ~, 60 Hz, fuse T 500 mA H
	U.K./Australia	240 V ~, 50 Hz, fuse T 315 mA H
	Europe	230 V ~, 50 Hz, fuse T 315 mA H

DIMENSIONS AND WEIGHT

Dimensions (H x W x D)	approx. 3 1/2" (88 mm) x 9 1/2" (241 mm) x 13 1/10" (332 mm)
Weight	approx. 3.5 kg (7 lbs. 4 oz)

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

The information contained in this manual is subject to change without notice. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER is a registered trademarks. ALL RIGHTS RESERVED.

© 2002 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany

Tel. +49 (0) 21 54 / 92 06-0, Fax +49 (0) 21 54 / 92 06-30
